


KYOCERA C-DIP (CERAMIC DUAL INLINE PACKAGES)

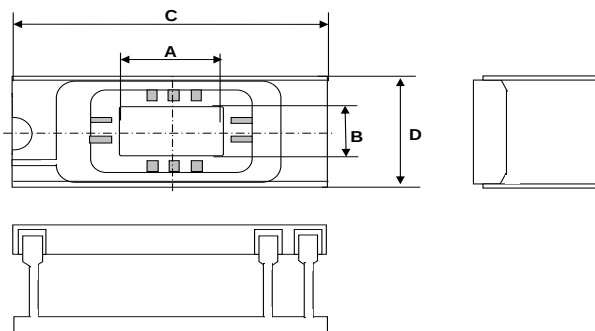

Inquiries about this list ?
Please Click Here.

UNIT : mm (If you prefer inch dimensions, please click here.)

#=Connected pin number
N=No Metallization
0=No Connection

R0157C

LEAD COUNT	UNIT	CAVITY			OVERALL C x D	LAYER THICKNESS				LEAD		KYOCERA MATERIAL CODE A440: Black A473: White	CONNECTION		DRAWING NO.
		DIE CAV. A x B	W/B TIER SINGLE(S) DOUBLE(D)	UP(U) DOWN(D)		1ST	2ND	3RD	TOTAL	STAND OFF HEIGHT	PITCH		SEAL RING	DIE ATTACH	
8	mm	3.05MIN X 4.42	S	U	10.29MAX X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-S84832-B
8	mm	5.59 X 4.42	S	U	13.21 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-S77047-G
14	mm	4.57 X 3.81	S	U	17.78 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-80290-B
14	mm	5.59 X 3.96	S	U	17.78 X 7.87	0.508	0.508	-	2.032	0.889	2.540	A440	0	0	KD-80292
14	mm	6.60 X 4.31MIN	S	U	18.03MAX X 7.87	0.635	0.762	-	2.159	0.889	2.540	A440	0	0	KD-S87653-A
14	mm	6.60 X 4.31MIN	S	U	18.03MAX X 7.87	0.635	0.762	-	2.159	0.889	2.540	A440	0	N	KD-S89702
14	mm	7.62 X 4.83	S	U	18.03MAX X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-S82682-A
16	mm	4.57 X 3.81	S	U	20.32MAX X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0	0	KD-S76129-C
16	mm	5.08 X 4.32	S	U	20.32 X 7.87	0.635	0.635	-	2.286	0.889	2.540	A440	0	0	KD-S78343-B
16	mm	5.59 X 3.96	S	U	20.32 X 7.87	0.635	0.762	-	2.159	0.889	2.540	A440	0	0	KD-S83332-A
16	mm	6.10MIN X 4.19MIN	S	U	20.32 X 7.87	0.635	0.635	-	2.286	0.889	2.540	A440	0	8	KD-81625-B
16	mm	6.10MIN X 4.32MIN	S	U	20.32 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0	0, 1, 2, 8 or 10	KD-S78467-A
16	mm	6.10 X 4.11	S	U	20.32 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-S83229-A
16	mm	6.10 X 4.32MIN	S	U	20.32 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0, 1, 5, 7, 8 or 10	0, 1, 5, 7, 8 or 10	KD-75092-G
16	mm	6.10 X 4.32MIN	S	U	20.32 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0	0	KD-76135-G
16	mm	6.10 X 4.42	S	U	20.32 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0, 1 or 5	0, 1 or 5	KD-77048-G
16	mm	7.11 X 5.59	S	U	20.32 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0 or 1	0 or 1	KD-78138-E
16	mm	7.62 X 4, .57	S	U	20.32MAX X 7.87	0.508	0.508	-	2.159	0.889	2.540	A440	0	0	KD-S85766
16	mm	8.13 X 4.32MIN	S	U	20.32 X 7.87	0.635	0.508	-	2.032	0.889	2.540	A440	0	0	KD-76220-C
16	mm	12.45 X 5.72	S	U	20.32 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-82010-A
18	mm	5.59 X 4.32	S	U	22.86 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0, 1, 5, 8, 10 or 14	0, 1, 5, 8, 10 or 14	KD-S77309-E
18	mm	5.59 X 4.32	S	U	22.86 X 7.87	0.508	0.508	-	2.032	0.889	2.540	A440	0 or 3	0 or 3	KD-S79325-A
18	mm	6.73 X 4.42	S	U	22.86 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0 or 1	KD-S77032-H
18	mm	6.73 X 4.42	S	U	22.86 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0	0	KD-82281-A
18	mm	8.13 X 4.45	S	U	22.86 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0 or 1	KD-77175-F

#=Connected pin number
N=No Metallization
0=No Connection

R0157C

UNIT : mm (If you prefer inch dimensions, please click here.)

LEAD COUNT	UNIT	CAVITY			OVERALL C x D	LAYER THICKNESS				LEAD		KYOCERA MATERIAL CODE A440: Black A473: White	CONNECTION		DRAWING NO.
		DIE CAV. A x B	W/B TIER SINGLE(S) DOUBLE(D)	UP(U) DOWN(D)		1ST	2ND	3RD	TOTAL	STAND OFF HEIGHT	PITCH		SEAL RING	DIE ATTACH	
18	mm	12.19 X 5.08	S	U	22.86 X 7.87	0.635	0.635	-	2.286	0.889	2.540	A440	0	0	KD-S86302-C
20	mm	5.46 X 4.06	S	U	25.4 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-S84357-A
20	mm	5.46 X 4.42	S	U	25.4 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-77050-D
20	mm	6.35 X 3.81MIN	S	U	25.4 X 7.87	0.508	0.508	-	1.524	0.889	2.540	A440	0	0	KD-83438
20	mm	6.60 X 4.45	S	U	25.4 X 7.87	0.635	0.508	-	2.159	0.889	2.540	A440	0	0 or 1	KD-76250-C
20	mm	6.60 X 4.83	S	U	25.4 X 7.87	0.508	0.508	-	2.032	0.889	2.540	A440	0	0	KD-S85546-B
20	mm	8.13 X 4.45	S	U	25.4 X 7.87	0.508	0.635	-	2.159	0.889	2.540	A440	0	0	KD-S86832
20	mm	9.53 X 5.08	S	U	25.4 X 7.87	0.635	0.635	-	2.286	0.889	2.540	A440	0	0	KD-S87735-A
22	mm	6.35 X 5.59	S	U	27.43 X 10.41	0.635	0.635	-	2.032	0.965	2.540	A440	0	0	KD-82235
22	mm	7.11 X 6.60	S	U	27.43 X 10.41	0.508	0.635	-	2.159	0.965	2.540	A440	0	0	KD-S78409-D
22	mm	10.01 X 6.20	S	U	27.43 X 10.41	0.635	0.635	-	2.159	0.965	2.540	A440	0	0	KD-84421-B
24	mm	6.35SQ	S	U	30.48 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0, 1, 12 or 24	0, 1, 12 or 24	KD-S78299-J
24	mm	7.87SQ	S	U	30.48 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0, 1, 9 or 12	0, 1, 9, 12 or 24	KD-S78382-H
24	mm	7.87SQ	S	U	30.48 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S86840
24	mm	7.87SQ	S	U	30.48 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0, 1, 9 or 12	0, 1, 9 or 12	KD-S88460
24	mm	8.89 X 4.45	S	U	30.48 X 7.87	0.635	0.508	-	2.159	1.270	2.540	A440	0	0	KD-80160-D
24	mm	9.65SQ	S	U	30.48 X 15.49	0.635	0.635	-	2.286	1.270	2.540	A440	0	0 or 21	KD-78495-C
24	mm	9.65SQ	S	U	30.48 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0 or 1	KD-78516-D
24	mm	16.51 X 10.92	S	U	30.48 X 15.49	0.635	0.635	-	2.540	1.270	2.540	A473	SK=0	0	KD-83512-A
24	mm	16.51 X 10.92	S	U	30.48 X 15.49	0.635	0.635	-	2.540	1.270	2.540	A473	0	0	KD-S92459
28	mm	5.59SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S88909-A
28	mm	6.35SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0, 1 or 14	0, 1 or 14	KD-78368-E
28	mm	6.35SQ	S	U	35.56 X 15.49	0.508	0.508	-	2.032	1.270	2.540	A440	0 or 1	0 or 1	KD-78373-B
28	mm	6.35 X 7.62	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-84523-B
28	mm	7.87SQ	S	U	35.56 X 15.49	0.508	0.508	-	2.032	1.270	2.540	A440	0 or 1	0 or 1	KD-78371-C
28	mm	7.87SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0, 1 or 14	0, 1 or 14	KD-78385-G
28	mm	7.87SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-81533-F
28	mm	8.89SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S83103-B
28	mm	9.91SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S86496
28	mm	10.01SQ	S	U	35.56 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S82759-B
28	mm	10.41 X 7.62	S	U	35.56 X 15.49	0.635	0.635	-	2.286	1.270	2.540	A440	0	0	KD-S87577-A
28	mm	19.43 X 6.60	S	U	35.56 X 10.41	0.508	0.508	-	2.921	1.270	2.540	A440	1	1	KD-S87484-B
32	mm	11.43 X 5.59	S	U	40.64 X 7.87	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S89472
40	mm	6.35SQ	S	U	50.8 X 15.49	0.635	0.635	-	2.286	1.270	2.540	A440	0	0	KD-77169-A
40	mm	6.35SQ	S	U	50.8 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0 or 1	KD-S78282-D
40	mm	6.35SQ	S	U	50.8 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0, 1 or 40	KD-S78286-D
40	mm	7.87SQ	S	U	50.8 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0 or 1	0, 1 or 40	KD-78163-E
40	mm	7.87SQ	S	U	50.8 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0 or 1	KD-78300-F
40	mm	10.16SQ	S	U	50.8 X 15.49	0.635	0.635	-	2.286	1.270	2.540	A440	0	0, 1 or 40	KD-78302-D

#=Connected pin number
N=No Metallization
0=No Connection

R0157C

UNIT : mm (If you prefer inch dimensions, please click [here](#).)

LEAD COUNT	UNIT	CAVITY			OVERALL C x D	LAYER THICKNESS				LEAD		KYOCERA MATERIAL CODE A440: Black A473: White	CONNECTION		DRAWING NO.
		DIE CAV. A x B	W/B TIER SINGLE(S) DOUBLE(D)	UP(U) DOWN(D)		1ST	2ND	3RD	TOTAL	STAND OFF HEIGHT	PITCH		SEAL RING	DIE ATTACH	
40	mm	10.16SQ	S	U	50.8 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-80561-A
40	mm	11.43 X 8.89	S	U	50.8 X 15.49	0.635	0.635	-	2.286	1.270	2.540	A440	0	0	KD-S86A95-B
40	mm	13.34 X 10.16	S	U	50.8 X 15.49	0.635	0.635	-	2.286	1.270	2.540	A440	0	0	KD-S87609
48	mm	6.35SQ	S	U	60.96 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-80177-E
48	mm	7.87SQ	S	U	60.96 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S87934-C
48	mm	10.16SQ	S	U	60.96 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-S78527-G
48	mm	12.25 X 10.16	S	U	60.96 X 15.49	0.508	0.635	-	2.159	1.270	2.540	A440	0	0	KD-84193-A
64	mm	14.00MIN X 11.00MIN	S	U	81.28 X 23.11	0.508	0.635	-	2.159	1.270	2.540	A440	N	1	KD-S79513-E

* Contents in this list are subject to change without notice. It is recommended to confirm the latest information at the time of usage. We may not be able to accept requests based on old list.